



# SIL-400 NU



## PREMIUM MONO-PERC PV MODULE



CHUBB®

\* Chubb provides error and omission insurance to Silfab Solar Inc.

### INDUSTRY LEADING WARRANTY


All our products include an industry leading 25-year product workmanship and 30-year performance warranty.

### 35+ YEARS OF SOLAR INNOVATION

Leveraging over 35+ years of worldwide experience in the solar industry, Silfab is dedicated to superior manufacturing processes and innovations such as Bifacial and Back Contact technologies, to ensure our partners have the latest in solar innovation.

### QUALITY MATTERS

Utilizing premium quality materials and strict quality control management, Silfab is the industry leader in delivering the highest efficiency, premium quality PV modules.

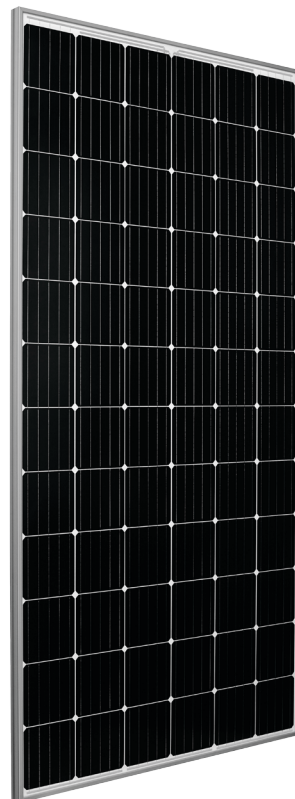

### ■ MAXIMUM POWER

Silfab's high-efficiency modules are optimized for commercial projects where maximum power density is preferred.

### ■ LIGHT AND DURABLE

Engineered to accommodate high front-side load conditions for test loads validated up to 5400Pa. The light-weight frame is exclusively designed for wide-ranging racking compatibility and durability.

### ■ DOMESTIC SUPPORT/SERVICES

Our 500+ North American team is ready to help our partners win the hearts and minds of customers, providing customer service and product delivery that is direct, efficient and local.

### ■ SLEEK DESIGN

Sleek design in silver frame with white backsheet.

### ■ PID RESISTANT

PID Resistant due to advanced cell technology and material selection. In accordance to IEC 62804-1.

| Electrical Specifications     |    | SIL-400 NU mono PERC |       |
|-------------------------------|----|----------------------|-------|
| Test Conditions               |    | STC                  | NOCT  |
| Module Power (Pmax)           | Wp | 400                  | 291.3 |
| Maximum power voltage (Vpmax) | V  | 40.0                 | 36.6  |
| Maximum power current (Ipmax) | A  | 10.1                 | 8.0   |
| Open circuit voltage (Voc)    | V  | 48.7                 | 44.8  |
| Short circuit current (Isc)   | A  | 10.5                 | 8.3   |
| Module efficiency             | %  | 19.6                 | 17.9  |
| Maximum system voltage (VDC)  | V  | 1500                 |       |
| Max series fuse rating        | A  | 20                   |       |
| Power Tolerance               | Wp | 0 to +10             |       |

Measurement conditions: STC 1000 W/m<sup>2</sup> • AM 1.5 • Temperature 25 °C • NOCT 800 W/m<sup>2</sup> • AM 1.5 • Measurement uncertainty ≤ 3%  
 • Sun simulator calibration reference modules from Fraunhofer Institute. Electrical characteristics may vary by ±5% and power by 0 to +10W.

| Temperature Ratings          |  | SIL-400 NU mono PERC |  |
|------------------------------|--|----------------------|--|
| Temperature Coefficient Isc  |  | 0.03 %/°C            |  |
| Temperature Coefficient Voc  |  | -0.3 %/°C            |  |
| Temperature Coefficient Pmax |  | -0.38 %/°C           |  |
| NOCT (± 2°C)                 |  | 44 °C                |  |
| Operating temperature        |  | -40/+85 °C           |  |

| Mechanical Properties and Components                 | SIL-400 NU mono PERC  |                                   |   |
|--|---|-----------------------------------|---|
|  | Metric  |                                   | Imperial  |
| Module weight  | 22 kg ±0.3 kg   |                                   | 48.5 ±0.6 lbs   |
| Dimensions (H x L x D)                               | 2026 mm x 1006 mm x 38 mm   |                                   | 79.8 in x 39.6 in x 1.5 in  |
| Maximum surface load (wind/snow)*                    | 2400 Pa rear load / 5400 Pa front load N/m²   |                                   | 50.13/112.8 lb/ft^2   |
| Hail impact resistance                               | ø 25 mm at 83 km/h  |                                   | ø 1 in at 51.6 mph  |
| Cells  | 72 - Si mono PERC - 5 busbar<br>158.75 x 158.75 mm  |                                   | 72 - Si mono PERC - 5 busbar<br>6.25 x 6.25 Inch                    |
| Glass  | 3.2 mm high transmittance, tempered, DSM anti-reflective coating  |                                   | 0.126 in high transmittance, tempered, DSM anti-reflective coating  |
| Cables and connectors (refer to installation manual) | 1200 mm, ø 5.7 mm, MC4 from Staubli   |                                   | 47.2 in, ø 0.22 in (12AWG), MC4 from Staubli                        |
| Backsheet  | Highly reflective white backsheet, high durability, superior hydrolysis resistance, multi-layer dielectric film |                                   |   |
| Frame  | Anodized Aluminum (Silver)  |                                   |   |
| Bypass diodes  | 3 diodes-30SQ045T (45V max DC blocking voltage, 30A max forward rectified current)                              |                                   |   |
| Junction Box   | UL 3730 Certified, IEC 62790 Certified, IP67 rated  |                                   |   |
| Warranties   | SIL-400 NU mono PERC  |                                   |   |
| Module product workmanship warranty                  | 25 years**  |                                   |   |
| Linear power performance guarantee                   | 30 years  |                                   |   |
|  | ≥ 97.1% end 1 <sup>st</sup> year  | ≥ 91.6% end 12 <sup>th</sup> year | ≥ 85.1% end 25 <sup>th</sup> year ≥ 82.6% end 30 <sup>th</sup> year |

| Certifications |  | SIL-400 NU mono PERC  |  |
|----------------|--|---|--|
| Product        |  | ULC ORD C1703, UL1703, CEC listed, UL 61215-1/-1-1/-2, UL 61730-1/-2, IEC 61215-1/-1-1/-2***, IEC 61730-1/-2***, CSA C22.2#61730-1/-2, IEC 62716 Ammonia Corrosion; IEC61701:2011 Salt Mist Corrosion Certified, UL Fire Rating: Type 1 |  |
| Factory        |  | ISO9001:2015  |  |

|                        |                        |
|------------------------|------------------------|
| Option A Horizontal    | Option B Vertical      |
| Modules Per Pallet: 25 | Modules Per Pallet: 27 |
| Pallets Per Truck: 30  | Pallets Per Truck: 28  |
| Modules Per Truck: 750 | Modules Per Truck: 756 |

\*⚠ Warning. Read the Safety and Installation Manual for mounting specifications and before handling, installing and operating modules.

\*\*12 year extendable to 25 years subject to registration and conditions outlined under "Warranty" at [www.silfabsolar.com](http://www.silfabsolar.com).

\*\*\*Certification in progress. IEC 61730/61215

Third-party generated pan files from Fraunhofer-Institute for Solar Energy Systems ISE are available for download at: [www.silfabsolar.com/downloads](http://www.silfabsolar.com/downloads)

